

# ELITE™

DMSS 2.4GHz SPREAD SPECTRUM SYSTEM

## FIRMWARE UPDATE GUIDE

### ELITE FIRMWARE UPDATE PROCEDURE

---

Here are the procedure how to form an update entirely.

- 1 OS-A Firmware update
- 2 OS-B Firmware update
- 3 Apps setting changes

**【 CAUTION 】**

**Be sure to store your model data in the SD card, as firmware up date shall erase complete model data.**

---

Store the downloaded data in the SD card

OS-A Firmware name : update.zip

Place and save the data right directly below the SD card as “unzipped”

OS-B Firmware name : updateB.gz

Place update.gz and save the data directly below the SD card.


---

# 1

## OS-A Firmware Update [ 1 ]

**[Caution]** Be sure that Transmitter battery pack is fully charged before making firmware update.

Press the “return” button simultaneously while turning on the main power.

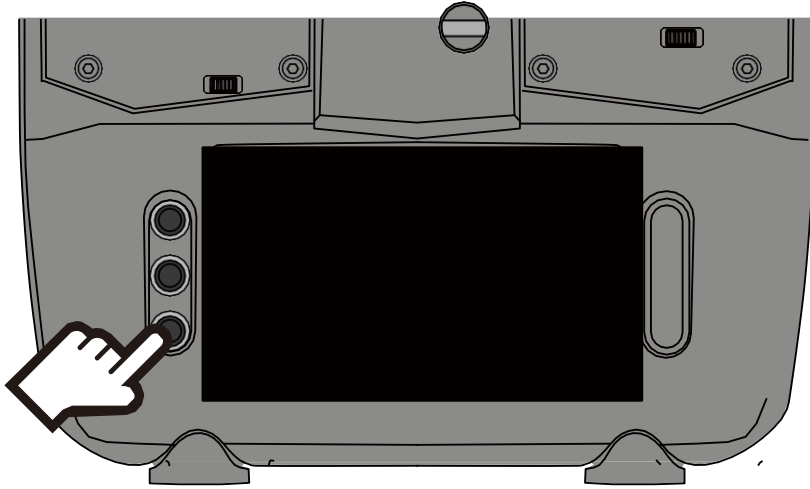

The following screen will be indicated, Select “Apply update from SD card” by using the return button to move the cursor. Adjust **long tap** on return button.



When the below indication appears, using return button to move the cursor to the “update.zip” Adjust **long tap** on the button, Update shall commence.



Indication of “SUCCESS” on the display tells that update is completed.

Tap return button.

```

E:setup_install_mounts, expect /mnt/exte
rnal_sd
Finding update package...
Opening update package...
Verifying update
Update package ver
(result 0).
Installing update
Target: Android/rk
G47K/root09090805:
Patching system im

E:setup_install_mounts, expect /mnt/exte
rnal_sd
Finding update package...
Opening update package...
Verifying update p
Update package ver
(result 0).
Installing update..
Target: Android/rk
G47K/root09090805:
Patching system im
Writing uboot loader img...
script succeeded: result was [1.000000]

Install from SD card complete.
[SUCCESS !]
** Press back-key to continue **

```


※Note: If “ERROR” message appears,

- Turn the Main power off and arrange another update exactly same as above procedure again.
- If the “error” continues, Erase the entire data from the SD card and re-do whole procedure.

When the below indication appears on the display, Move the cursor to the “Reboot system now” and adjust **long tap** on return button, it shall start the reboot.。




After the update, Build number can be checked by  
“Others” => “Settings” => “Tablet status”

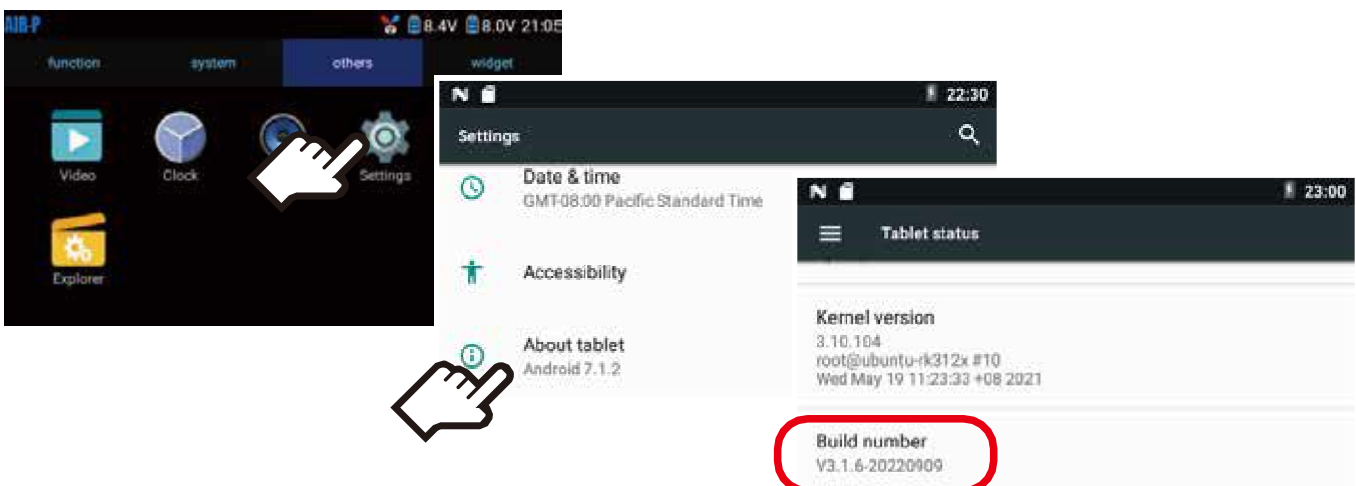


**[Caution]** Be sure that Transmitter battery pack is fully charged before making firmware update.

When the OS-B requires the update, display shall indicate following.

To commence the update, tap “START”

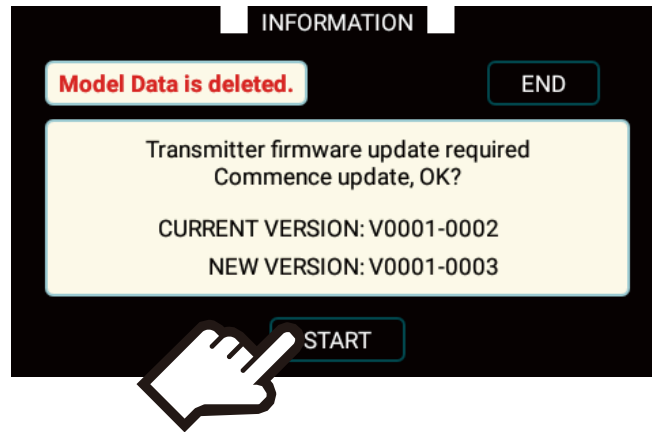


Final confirmation shall be indicated on the display, tap “YES” to continue of update.

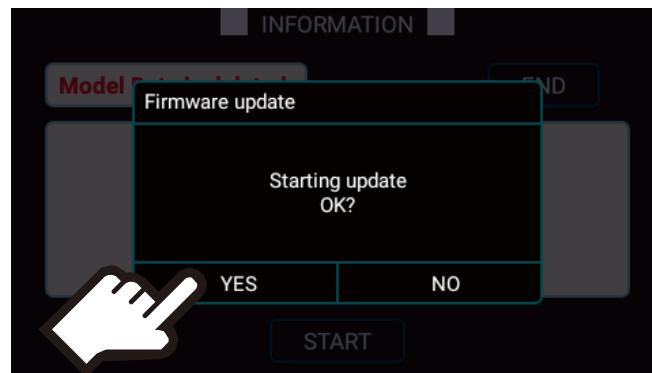


※NOTE: When the display indicates “Cannot find the update file” ,

- delete the data on SD card restore the data again.
- If the error continues, please replace the SD card name rename as “SD” and try again.


Following display shows the updating, please standby and wait until complete the updating.

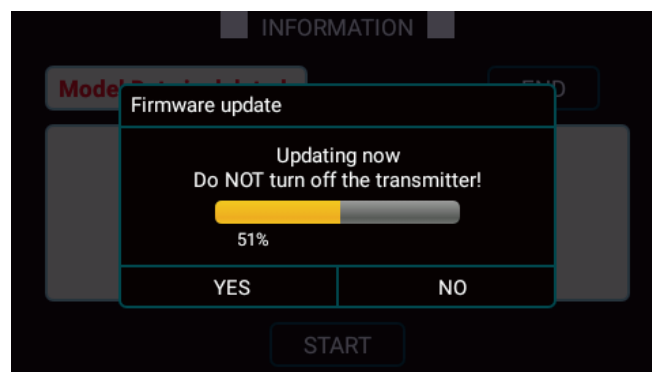


Upon completion of the update, display shows the following message indicates that all the model data has been deleted. So, it requires to arrange initial set up.

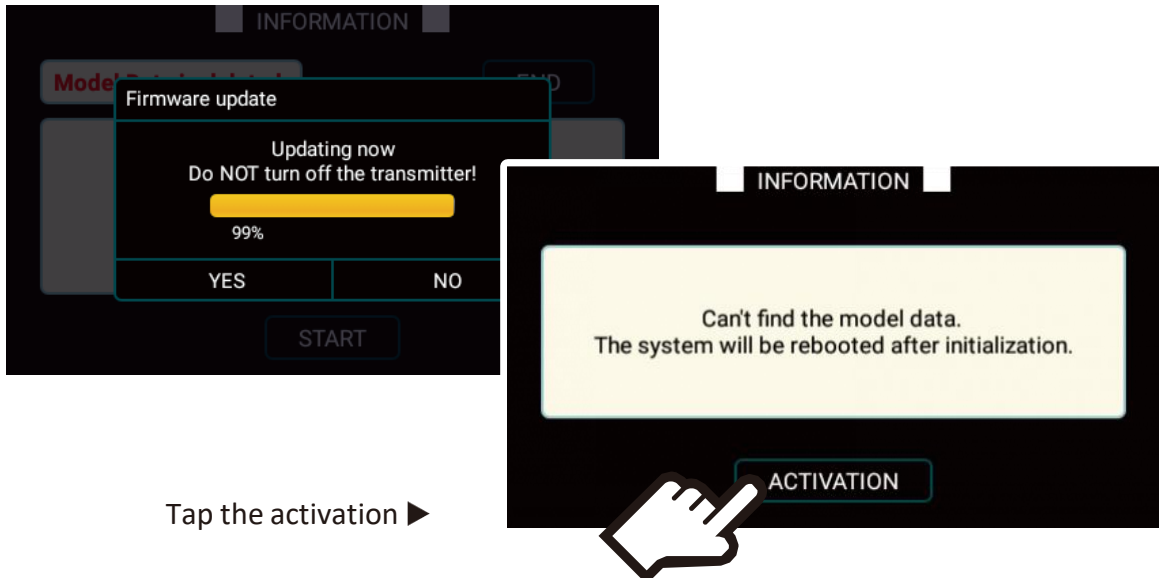

Following indication shall be displayed meaning that update is completed.

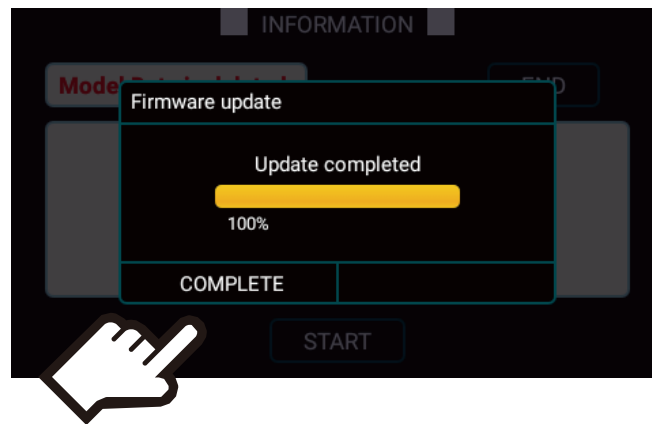

After the update, Build number can be checked by "System" => "TX SETTING"

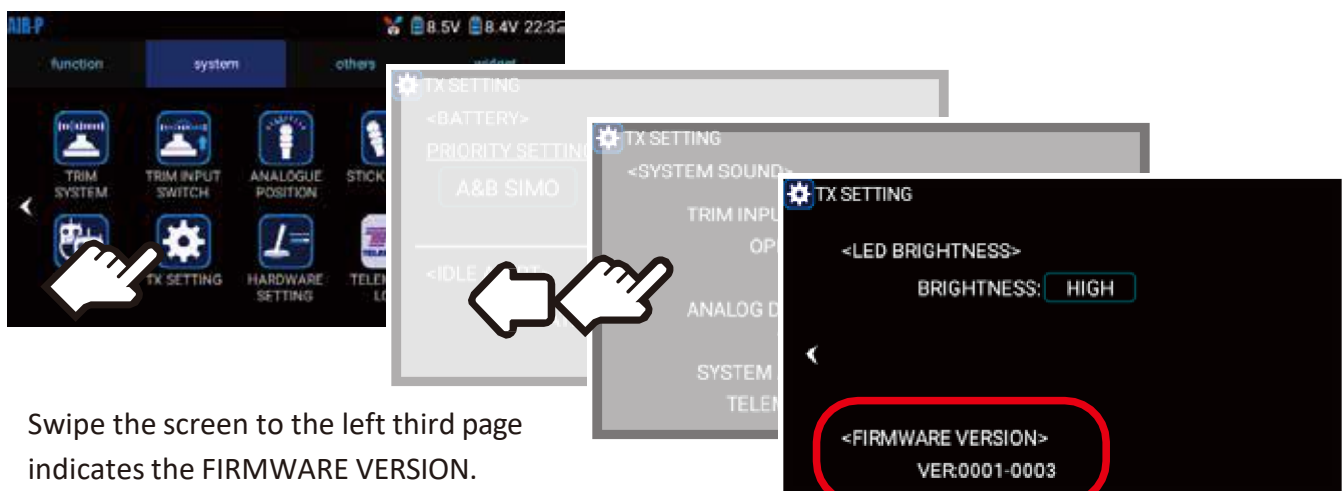


# 3


## Apps setting changes

Some apps may need to change the “draw over other Apps” setting after the FW update, so check with them.

Move to “Others” => “Settings” => “Application” Tap the updating Apps (e.g. Servo Hold Service)

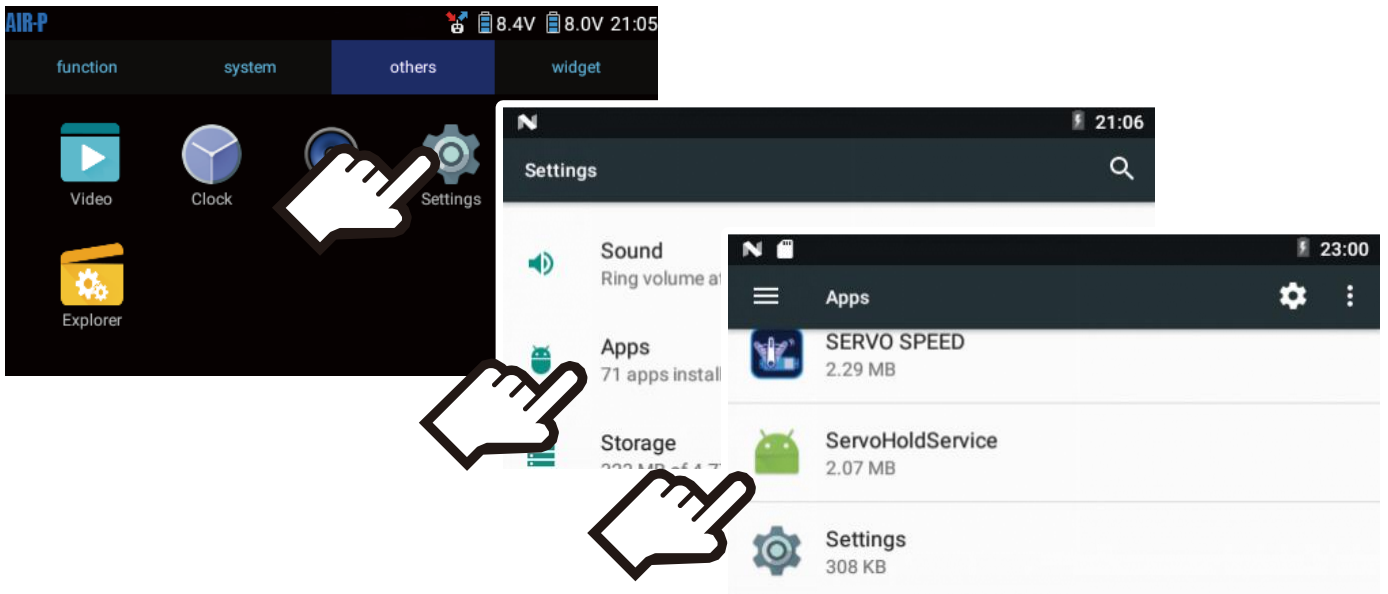

Tap the Apps which require of setting changes, scroll down the menu, Tap the Draw over other apps.

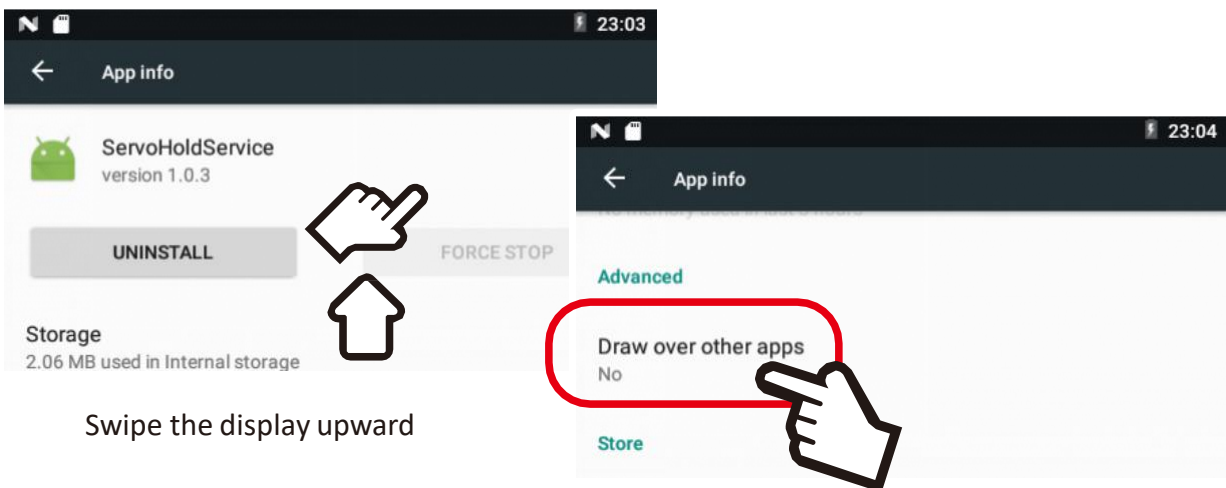


Swipe the display upward

It is indicated as “NO”


# 3

## Apps setting changes

Tap the Slide switch to the right of Permit drawing over other apps.

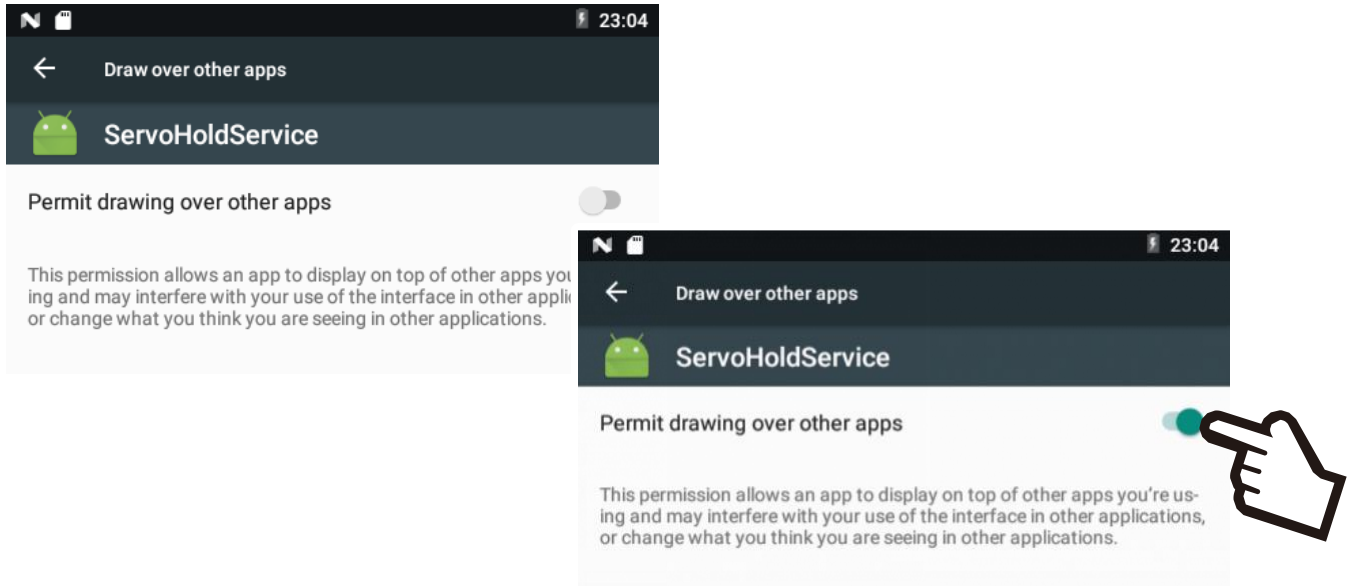

Display shows as “YES” meaning it is completed of setting changes.

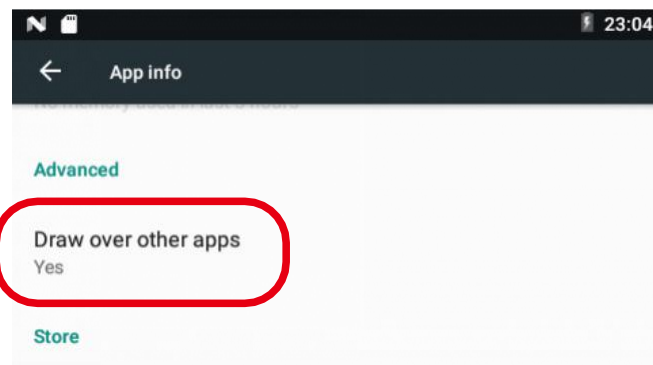

★If the display show as “YES” , it is not necessary to arrange setting changes.

Here under are the Apps which needs to be adjust as “YES” for Draw over othe apps.



ServoHoldService



WarningDisp



StartupErrorService